


[illegible]

S-1; S-2; S-3; S-4; S-5; S-6; S-7
S-11; S-12; S-13; S-15; S-16; S-24

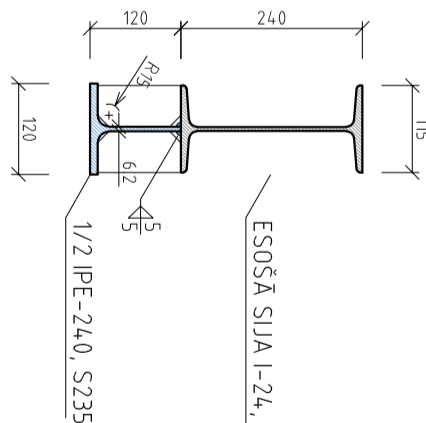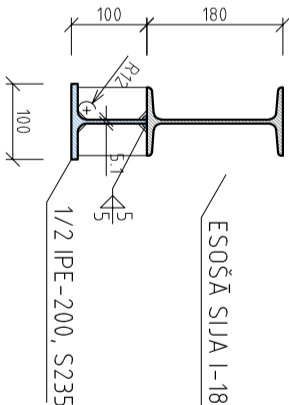


S-17; S-18; S-21; S-22;

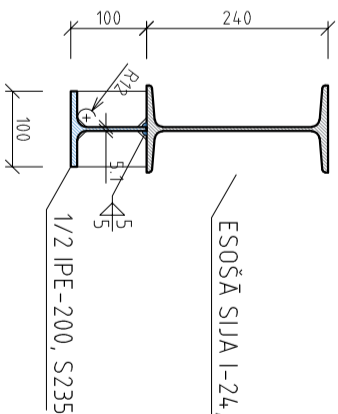

68

S-14; S-25; S-26

OTRĀ STĀVA PĀSEĢUMA SIJU PASTĪPRINĀJUMU SPECIFIKĀCIJA									
SJAS	PASTĪPRINĀJUMA	PASTĪPRINĀJUMA IZMĒRI	TERAUDA SKAITS	SVARS	VRISMA	STANDARTS			
MĀRKĀ	PROFILS	b, mm	h, mm	S, mm	K35	kg	m ²		
S-1	1/2 JPE-240	120	120	74,00	S 235	1	113,6	3,47	EN 10034, 1993
S-2	1/2 JPE-240	120	120	74,00	S 235	1	113,6	3,47	EN 10034, 1993
S-3	1/2 JPE-240	120	120	74,00	S 235	1	113,6	3,47	EN 10034, 1993
S-4	1/2 JPE-240	120	120	74,00	S 235	1	113,6	3,47	EN 10034, 1993
S-5	1/2 JPE-240	120	120	74,00	S 235	1	113,6	3,47	EN 10034, 1993
S-6	1/2 JPE-240	120	120	74,00	S 235	1	113,6	3,47	EN 10034, 1993
S-7	1/2 JPE-240	120	120	74,00	S 235	1	113,6	3,47	EN 10034, 1993
S-11	1/2 JPE-240	120	120	65,00	S 235	1	99,8	3,05	EN 10034, 1993
S-12	1/2 JPE-240	120	120	62,00	S 235	1	99,8	3,05	EN 10034, 1993
S-13	1/2 JPE-240	120	120	62,00	S 235	1	99,8	3,05	EN 10034, 1993
S-14	1/2 JPE-200	120	100	57,00	S 235	1	63,8	2,23	EN 10034, 1993
S-15	1/2 JPE-240	120	120	64,00	S 235	1	98,24	3,0	EN 10034, 1993
S-16	1/2 JPE-240	120	120	57,00	S 235	1	87,5	2,68	EN 10034, 1993
S-17	1/2 JPE-200	120	100	43,00	S 235	1	48,16	1,7	EN 10034, 1993
S-18	1/2 JPE-200	120	100	43,00	S 235	1	48,16	1,7	EN 10034, 1993
S-19	1/2 JPE-240	120	120	45,00	S 235	1	69,1	2,11	EN 10034, 1993
S-20	1/2 JPE-240	120	120	45,00	S 235	1	69,1	2,11	EN 10034, 1993
S-21	1/2 JPE-200	100	100	43,00	S 235	1	48,16	1,7	EN 10034, 1993
S-22	1/2 JPE-200	100	100	43,00	S 235	1	48,16	1,7	EN 10034, 1993
S-24	1/2 JPE-240	120	120	48,00	S 235	1	73,68	2,25	EN 10034, 1993
S-25	1/2 JPE-200	100	100	50,00	S 235	1	56,0	1,95	EN 10034, 1993
S-26	1/2 JPE-200	100	100	50,00	S 235	1	56,0	1,95	EN 10034, 1993
							1860,66	58,52	

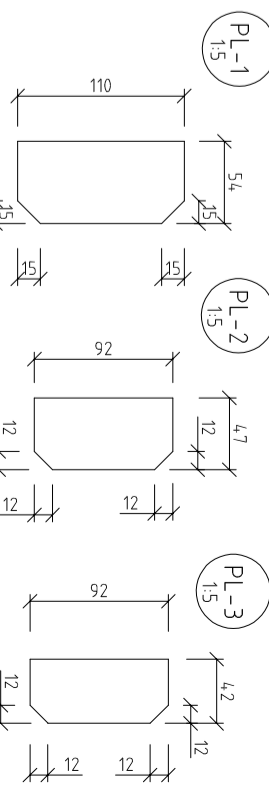[illegible][illegible]